

Light, fast and  
well balanced!



CE

## BeA Stapler 14/40-770C

- Very light, fast and well balanced 16/17 gauge (7/16" crown) stapler
- Fast shot sequence, increases productivity
- Powerful drive up to 40mm (1 5/8")
- New ergonomic handgrip, operator friendly, less fatigue
- Adjustable exhaust
- Depth-control adjustment for best performance
- New magazine design for quick reloading
- Quick release front nose
- Available with contact actuation or with single shot actuation
- Accepts all staples type 14 and 16 from 18 - 40 mm (5/8" - 1 5/8")
- Quality made in Germany

### Applications

Furniture frame assembly, pallets and crates, framing, roofing, subflooring, packaging



# BeA 14/40-770C

## Technical Dates




Type description	14/40-770C
Item code	12000533
Magazin type	Top loader
Safety system	Contact actuation*
Fastener type	Type 14 and type 16
Magazine capacity	Type 14 = 168 staples Type 16 = 152 staples
Fasteners per strip	Type 14 = 75 staples Type 16 = 70 staples
Operating pressure	6 - 8 bar (90 - 120 psi)
Max operating pressure	8 bar (120 psi)
Air consumption / operation	1.10 litre / 6 bar
Inner hose diameter	Ø 9 - 10 mm recommended
Emmision sound pressure level at the workstation	L pA, 1s, d= 78 dB
Single-shot emmision sound pressure level	L WA, 1s, d= 85 dB
Weight	2.0 kg (4.41 lbs)
Vibration level as per ISO 8662-11 is 2.7 m/s <sup>2</sup> .	
Accesories supplied with the tool	Operating instructions, spare parts list, service instructions, allen wrenches,

Subject to technical modifications

\*Also available with single shot actuation set

## Staples Type 14 + 16

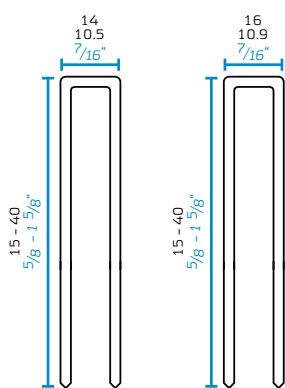

Description	Length
14/18 NK HZ	18 (3/4")
14/21 NK HZ	21 (7/8")
14 + 16/25 NK HZ	25 (1")
14/28 NK HZ	28 (1 1/8")
14 + 16/30 NK HZ	30 (1 3/16")
14 + 16/32 NK HZ	32 (1 1/4")
14 + 16/35 NK HZ	35 (1 3/8")
14 + 16/38 NK HZ	38 (1 1/2")
14 + 16/40 NK HZ	40 (1 5/8")

Staples are also available in BK HZ

Joh. Friedrich Behrens AG  
Industrielle Befestigungssysteme  
Bogenstrasss 43 - 45  
22926 Ahrensburg  
Germany

Further Information:  
Tel: + 49(0) 41 02 78 - 280  
Fax + 49 (0) 41 02 78 - 270  
eMail:info@bea-group.com  
www.bea-group.com

BeA is a member of following applications:



SPEED. POWER. RELIABILITY.