



Light, fast and well balanced!




# BeA Stapler 14/50-780C

- Very light, fast and well balanced 16/17 gauge (7/16" crown) stapler
- Fast shot sequence, increases productivity
- Powerful drive up to 50 mm (2")
- New ergonomic handgrip, operator friendly, less fatigue
- Adjustable exhaust
- Depth-control adjustment for best performance
- New magazine design for quick reloading
- Quick release front nose
- Available with contact actuation or with single shot actuation
- Accepts all staples type 14 and 16 from 32 - 50 mm (1¼" - 2")
- Quality made in Germany
- Slanted nose for flush stapling

## Applications:

Furniture frame assembly, pallets and crates, prefabricated house industry, framing, roofing, subflooring

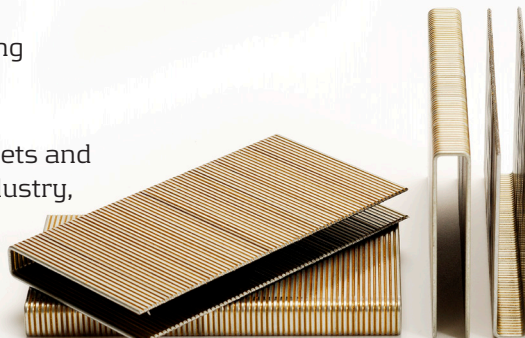

Quick release



Depth-control



Slanted nose



Fast easy loading system

## BeA 14/50-780C

### Technical Dates




Type description	14/50-780C
Item code	12000522
Magazin type	Top loader
Safety system	Contact actuation*
Fastener type	Type 14 and type 16
Magazine capacity	Type 14 = 168 staples Type 16 = 152 staples
Fasteners per strip	Type 14 = 75 staples Type 16 = 70 staples
Operating pressure	6 - 8 bar (90 - 120 psi)
Max operating pressure	8 bar (120 psi)
Air consumption / operation	1.10 litre / 6 bar
Inner hose diameter	Ø 9 - 10 mm recommended
Emmision sound pressure level at the workstation	L pA, 1s, d= 80 dB
Single-shot emmision sound pressure level	L WA, 1s, d= 86 dB
Weight	2.31 kg (5.09 lbs)
Vibration level as per ISO 8662-11 is	2.86 m/s <sup>2</sup> .
Accesories supplied with the tool	Operating instructions, spare parts list, service instructions, allen wrenches,

Subject to technical modifications

\*Also available with single shot actuation set: item no.

### Staples Type 14 + 16



Description	Length
14+ 16/32 NK HZ	32 (1 1/4")
14+ 16/38 NK HZ	38 (1 1/2")
14+ 16/45 NK HZ	45 (1 3/4")
14+ 16/50 NK HZ	50 (2")

Staples are also available in BK HZ

Joh. Friedrich Behrens AG  
Industrielle Befestigungssysteme  
Bogenstrasss 43 - 45  
22926 Ahrensburg  
Germany

Further Information:  
Tel: + 49(0) 41 02 78 - 280  
Fax + 49 (0) 41 02 78 - 270  
eMail:info@bea-group.com  
www.bea-group.com

BeA is a member of following applications:

