


Pneumatic Stapler Type 90/40-621

The BeA 90/40-621 is a light-weight, well balanced tool which operates quietly and efficiently while driving narrow crown staples type 90 up to 40mm. The compact design allows the tool to be used even in hard to reach areas. The narrow nose makes the 90/40-621 the ideal tool for interior construction.

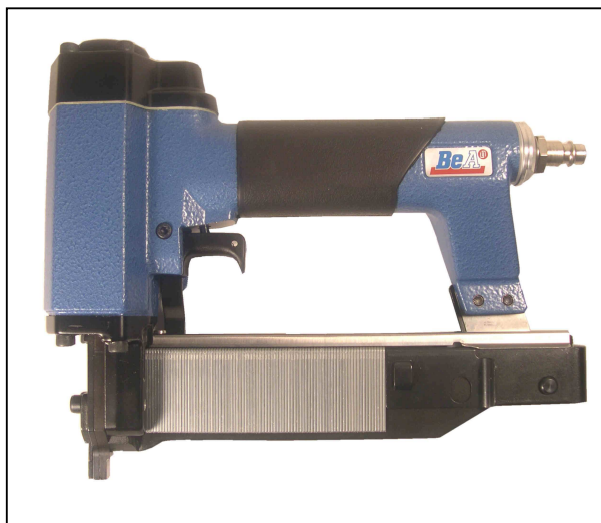

Popular applications:

Bag closure, tagging, packaging, automotive, shoe, industry, art & crafts, light assembly.

Length:	221 mm
Width:	57 mm
Height:	198 mm

Technical data

Type description:	90/40-621 Standard	90/40-621 Single actuation
Article code:	12000230	12000407
Magazine type :	Top loader	Top loader
Fastener type:	Contact actuation	Single actuation
Magazine capacity:	Type 90	Type 90
Fasteners per strip:	125	125
Operating pressure:	1 x 100	1 x 100
Max. operating pressure:	6 – 8 bar	6 – 8 bar
Air consumption/operation:	8 bar	8 bar
Trigger frequency:	0.9 litres / 6 bar	0.9 litres / 6 bar
Inner hose diameter:	Ø 9 mm LW recommended	Ø 9 mm LW recommended
Emission sound pressure level at the workstation:	L pA, 1s, d= 79 dB	L pA, 1s, d= 79 dB
Single-shot emission sound pressure level:	L WA, 1 s,d= 87 dB	L WA, 1 s,d= 87 dB
Weight:	1.34 kg	1.34 kg

The vibration as per document no. CEN/TC 255 WG 1 N 47.3 is under the declaration limit as per EN 292-1, amendment A.

Extras supplied with the stapler:

Operating instructions, spare parts list, service instructions, silencer.

Subject to technical modifications.

Accessories:

Article code	Description
14406196	Single actuation set

All BeA pneumatic tools can be jig-mounted
We supply the necessary accessories and equipments.



This tool conforms to the EG Directive
for Machinery (89/392 EWG)


Pneumatic Stapler Type 90/40-621

Staples type 90



BeA Deutschland
Befestigungstechnik
P.O.Box 14 80
D-22904 Ahrensburg
Phone: (04102) 78-0
Fax: (04102) 78-250
www.bea-group.com
e-mail: info@bea-group.com

a division of
Joh. Friedrich Behrens AG



Description	L = Length mm
90/15 NK HZ	15
90/18 NK HZ	18
90/21 NK HZ	21
90/25 NK HZ	25
90/30 NK HZ	30
90/32 NK HZ	32
90/35 NK HZ	35
90/38 NK HZ	38
90/40 NK HZ	40

Other lengths and finishes are also available on request.

Explanations:

NK = galvanized steel	BK = bright steel	LM = aluminium	HZ = resin coated
NKS = galvanized steel, extra hard	BKS = bright steel, extra hard	NR = stainless steel, material. 1.4401	DP = divergent point
NKH = galvanized steel, hard	MS = brass	RF = rust resistant, material 1.4301	SA = step cut