

Pneumatic Tacker Type 92/40-712

The BeA 92/40-712 is a well balanced tool, that operates quietly and efficiently while driving narrow crown staples type 92 from 18 to 40mm. The tool has the power to drive longer length staples type 92 in problematic, harder to penetrate materials. The compact design allows the tool to be used even in hard to reach areas. The narrow nose of the 92/40-712 tool affords better operator visibility for more precise fastener placement.



Popular applications:

Cabinetry, interior trim / finish work, millwork, casegoods, underlayment.

Length:	221 mm
Width:	70 mm
Height:	228 mm

Technical data

Type description:	92/40-712 Contact
Article code:	12000236
Magazine type :	Top loader
Safety:	Contact actuation
Fastener type:	Type 92
Magazine capacity:	125
Fasteners per strip:	1 x 100
Operating pressure:	5 – 8 bar
Max. operating pressure:	8 bar
Air consumption/operation:	0,9 litre / 6 bar
Inner hose diameter:	Ø 9 mm LW recommended
Emission sound pressure level at the workstation:	L pA, 1s, d= 82 dB
Single-shot emission sound pressure level:	L WA, 1 s,d= 91 dB
Weight:	2,1 kg

The vibration as per document no. CEN/TC 255 WG 1 N 47.3 is 3,0 m/s²

Extras supplied with the nailer: Operating instructions, spare parts list, service instructions, silencer.

Subject to technical modifications.

Accessories:

Articel code	Description
14406199	Single actuation set
14403421	Remote valve
14403536	Mounting flange

All BeA pneumatic tools can be jig-mounted
We supply the necessary accessories and equipments.




This tool conforms to the EG Directive
for Machinery (89/392 EWG)

Pneumatic Tacker Type 92/40-712

Staples type 92



BeA Deutschland
Befestigungstechnik GmbH
P.O.Box 14 80
D-22904 Ahrensburg
Phone: (04102) 78-0
Fax: (04102) 78-250
www.bea-group.com
e-mail: info@bea-group.com

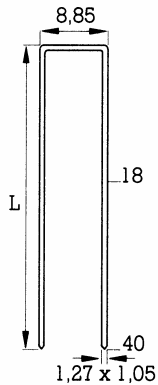

Description	L = Length mm
92/18 NK HZ	18
92/21 NK HZ	21
92/25 NK HZ	25
92/28 NK HZ	28
92/30 NK HZ	30
92/32 NK HZ	32
92/35 NK HZ	35
92/38 NK HZ	38
92/40 NK HZ	40

Other lengths and finishes are also available on request.

Explanations:

NK = galvanized steel	BK = bright steel	LM = aluminium	HZ = resin coated
NKS = galvanized steel, extra hard	BKS = bright steel, extra hard	NR = stainless steel, material. 1.4401	DP = divergent point
NKH = galvanized steel, hard	MS = brass	RF = rust resistant, material 1.4301	SA = step cut