

Pneumatic Tacker

Type SK DA 663-771

The compact and well balanced nailer drives finish nails type SKDA 600 from 25 – 63mm's. The magazine is made for easy and accurate nail setting in tight corners. The nailer is equipped with an comfortable rubber grip and an adjustable exhaust deflector. The adjustable depth control and the Quick-release make the SKDA 663-771 to an ideal tool for several applications.



Popular applications:

Paneling, trim, upholstery, furniture, windows, doors, decoration.

Length: 319 mm
 Width: 91 mm
 Height: 304 mm

Technical data

Type description:	SK DA 663-771
Article code:	12100345
Magazine type :	Rear loader
Safety:	Contact actuation
Fastener type:	Finish nails SKDA 600
Magazine capacity:	100
Fasteners per strip:	1x 94
Operating pressure:	5 – 7 bar
Max. operating pressure:	7 bar
Air consumption/operation:	2.0 litre / 6 bar
Inner hose diameter:	Ø 9 mm LW recommended
Emission sound pressure level at the workstation:	L pA, 1s, d= 78 dB
Single-shot emission sound pressure level:	L WA, 1 s,d= 84 dB
Weight:	1.86 kg

The vibration as per document no. CEN/TC 255 WG 1 N 47.3 is 3.17 m/s².

Extras supplied with the nailer:

Operating instructions, spare parts list, service instructions, carrying case, safety glasses, silencer.

Subject to technical modifications.

All BeA pneumatic tools can be jig-mounted
 We supply the necessary accessories and equipments.



This tool conforms to the EG Directive
 for Machinery (89/392 EWG)

Product leaflet SK DA 663-771



Pneumatic Tacker Type SK DA 663-771

Finish nails type SK DA 600



BeA Deutschland
Befestigungstechnik
P.O.Box 14 80
D-22904 Ahrensburg
Phone: +49 (0) 4102 78-0
Fax: +49 (0)4102 78-250
www.bea-group.com
e-mail: info@bea-group.com

a division of
Joh. Friedrich Behrens AG

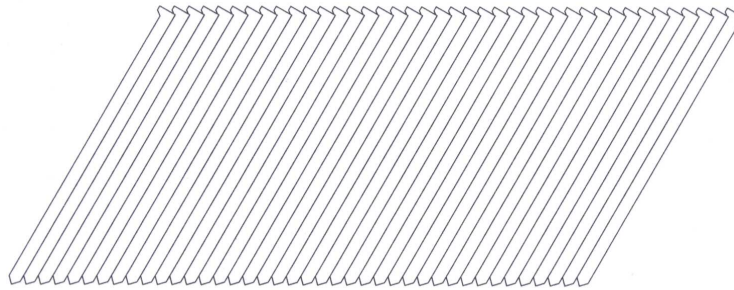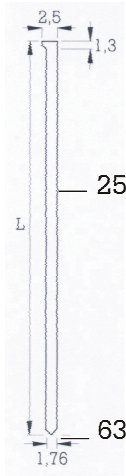

Description	L = Length mm
SK DA 625 NK HZ	25
SK DA 632 NK HZ	32
SK DA 638 NK HZ	38
SK DA 644 NK HZ	44
SK DA 650 NK HZ	50
SK DA 656 NK HZ	56
SK DA 663 NK HZ	63

SK DA 625 RF HZ 1.4301	25
SK DA 632 RF HZ 1.4301	32
SK DA 638 RF HZ 1.4301	38
SK DA 644 RF HZ 1.4301	44
SK DA 650 RF HZ 1.4301	50
SK DA 656 RF HZ 1.4301	56
SK DA 663 RF HZ 1.4301	63

Explanations:

NK = galvanized steel	BK = bright steel	LM = aluminium	HZ = resin coated
NKS = galvanized steel, extra hard	BKS = bright steel, extra hard	NR = stainless steel, material. 1.4401	DP = divergent point
NKH = galvanized steel, hard	MS = brass	RF = rust resistant, material 1.4301	SA = step cut