

Pneumatic Tool Type Variant 806

This versatile tool is capable of driving BeA staples type 14 and type 16 (155) from 25 to 65 mm in length as well as T-nails from 25 to 62 mm in length. The top loading magazine can hold up to 150 staples and the Variant 806 tool has the power for the really tough jobs.



Popular applications:

Expendable pallets, sheathing, roof decking, subflooring, furniture frames, door and window units, soffits, fascia.

Length: 353,5 mm
Width: 93 mm
Height: 292 mm

Technical data

Type description:	Variant 806 C	Variant 806
Article code:	Contact 12000271	Single 12000274
Magazine type :	Top loader	Top loader
Safety:	Contact actuation	Single actuation
Fastener type:	Type 14 / type 16 (155) / t - nails	Type 14 / type 16 (155) / t - nails
Magazine capacity:	156 / 144 / 103	156 / 144 / 103
Fasteners per strip:	2 x 75 / 2 x 70 / 3 x 33	2 x 75 / 2 x 70 / 3 x 33
Operating pressure:	5 – 8 bar	5 – 8 bar
Max. operating pressure:	8 bar	8 bar
Air consumption/operation:	2.2 litre / 6 bar	2.2 litre / 6 bar
Inner hose diameter:	Ø 9 mm LW recommended	Ø 9 mm LW recommended
Emission sound pressure level at the workstation:	L pA, 1s, d= 86 dB	L pA, 1s, d= 86 dB
Single-shot emission sound pressure level:	L WA, 1 s,d= 94 dB	L WA, 1 s,d= 94 dB
Weight:	3.26 kg	3.43 kg

The vibration as per document no. CEN/TC 255 WG 1 N 47.3 is 3.6 m/s²

Extras supplied with the nailer:

Operating instructions, spare parts list, service instructions, silencer.

Subject to technical modifications.

Accessories:

Article code	Description
14405272	Single actuation set
14403415	Remote valve
14403514	Mounting flange
14404669	Balancer eye

All BeA pneumatic tools can be jig-mounted
We supply the necessary accessories and equipments.



This tool conforms to the EG Directive
for Machinery (89/392 EWG)


Pneumatic Tool Type Variant 806




BeA Deutschland
Befestigungstechnik
P.O.Box 14 80
D-22904 Ahrensburg
Phone: (04102) 78-0
Fax: (04102) 78-250
www.bea-group.com
e-mail: info@bea-group.com

a division of
Joh. Friedrich Behrens AG

Staples type 14 and type 16 (155)

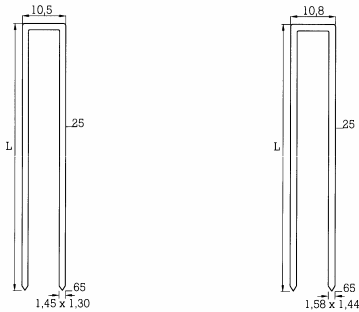

T-nails



Description	L = Length mm
14/25 NK HZ	25
14/30 NK HZ	30
14/32 NK HZ	32
14/35 NK HZ	35
14/38 NK HZ	38
14/40 NK HZ	40
14/50 NK HZ	50
14/55 NK HZ	55
14/65 NK HZ	65
16/25 NK HZ (155/25)	25
16/30 NK HZ (155/30)	30
16/35 NK HZ (155/35)	35
16/40 NK HZ (155/40) *	40
16/45 NK HZ (155/45) *	45
16/50 NK HZ (155/50) *	50
16/55 NK HZ (155/55) *	55
16/60 NK HZ (155/60) *	60
16/65 NK HZ (155/65) *	65
T 25 NK	25
T 32 NK	32
T 38 NK	38
T 50 NK	50
T 62 NK	62

*) Staples type 16 also available in NR HZ and VZ HZ.
Other lengths and finishes are also available on request.

Explanations:

NK = galvanized steel	BK = bright steel	LM = aluminium	HZ = resin coated
NKS = galvanized steel, extra hard	BKS = bright steel, extra hard	NR = stainless steel, material. 1.4401	DP = divergent point
NKH = galvanized steel, hard	MS = brass	RF = rust resistant, material 1.4301	SA = step cut