



145 SERIES

Wide Crown Staplers

The family of BeA 145 Series staplers [145/13-779C] [145/20-778C] [145/40-779C] are specifically designed for powerful stapling on applications requiring wide crown staples in industrial, and commercial settings.

- Balanced for fatigue for operation
- Ergonomic rubber grip
- Adjustable exhaust air deflector
- EZ Clear quick release front nose
- Contact trip safety actuation
- 145/13-779C [12200109] staple range: 12 mm [1/2"]
- 145/20-778C [12000648] staple range: 15-19 mm [5/8"-3/4"]
- 145/40-779C [12000639] staple range: 15-40 mm [5/8"-1 5/8"]

Applications

Fastening corrugated containers to pallets
Door, window, furniture frame assembly
Foam board insulation installation
Asphalt shingles/roofing

145 Series Wide Crown Staplers




Technical Data

Magazine type	Top load
Safety system	Contact actuation
Tool length	438 mm [17¼"]
Tool height	248 mm [9¾"]
Tool width	89 mm [3½"]
Tool weight	2.2kg [4.85 lbs]
Air inlet	1/4" NPT
Tool operation pressure	80-110 PSI [6-8 bar]
Tool air consumption	0.0426 scfm with 25 staples per minute @ 90 PSI 6 bar
Emission sound pressure	work station LpA [78 dB]
Single shot emission sound pressure level	LwA [85 dB]
Magazine capacity	140 staples [2 clips of 70]

Subject to technical modifications

Staple Type 145

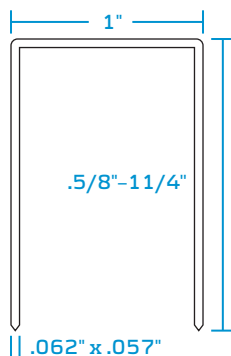

Description	Length
145/25	25 (1")
145/32	32 (1¼")
145/38	38 (1½")

BeA Fasteners USA, Inc.
4501 Green Point Drive, Suite 101
Greensboro, NC 27410
Phone +1 336-510-4232
Fax +1 336-510-4233
info@us.bea-group.com
www.beafastenersusa.com